LARISSA LA

Long-lasting aluminum construction for reliable performance, with added security features to prevent tampering in public areas

Copyright © 2026 Davis Lighting. All Rights Reserved.

LARISSA LA

Wall Light

Features

- Die-cast aluminium body (black)
- UV stabilised, flame retardant PC lens (opalised)
- Stainless steel screws
- One-piece silicon gasket
- 20 mm conduit gland
- Weatherproof IP65, IK08
- Anti vandal screw option

Applications

- Education
- Urban & Building

Standards

- IEC/AS/NZS 60598.1
- IEC/AS/NZS 60598.2.1
- IEC/AS/NZS CISPR 15

Copyright © 2026 Davis Lighting. All Rights Reserved.

LARISSA LA

Wall Light

Specifications

Model	LA30G2xK	LA50G2xK
Nominal Power (W)	30	50
Input Voltage	220 – 240 VAC 50 / 60 Hz	
Luminous Flux (lm)	2400	4000
Efficacy (lm/W)	80	80
CRI	> 80	
Power Factor	> 0.90	
Colour Temp. (K)	3000 / 4000	
LED Life L70B50 (hr)	30,000	
Ambient Temp. ta (°C)	40 °C	37 °C
Weight (kg)	2.2	

"x" denotes CCT, 3 = 3000K ; 4 = 4000K

Copyright © 2026 Davis Lighting. All Rights Reserved.

LARISSA LA

Wall Light

Lighting Distribution

LA30G24K

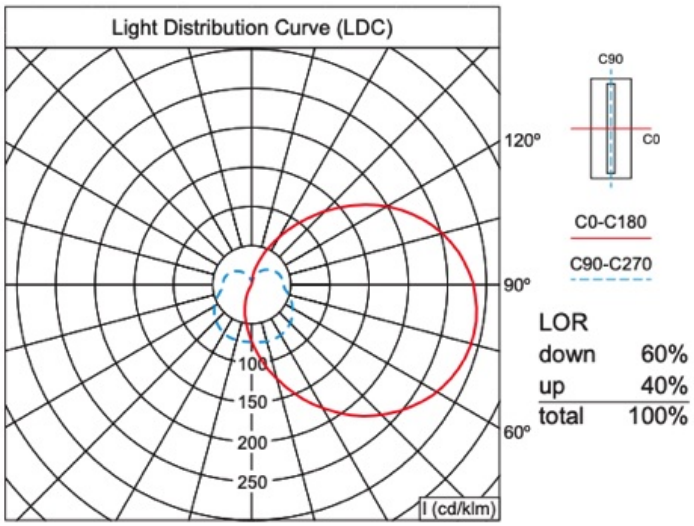

Utilisation Table (TM5)			LA30G24K-P17080202.IES								
Reflectances			Room Index								
C	W	F	0.75	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0
70	50	20	89	109	124	137	155	168	177	190	199
70	30	20	68	87	103	116	135	149	160	175	186
70	10	20	53	71	86	99	119	134	145	162	174
50	50	20	76	93	106	116	132	143	151	163	171
50	30	20	59	75	88	99	116	128	138	151	161
50	10	20	46	62	75	86	103	116	126	141	151
30	50	20	64	78	89	97	111	120	127	138	145
30	30	20	50	63	75	84	98	109	117	129	137
30	10	20	39	52	64	73	88	99	108	120	129
0	0	0	25	35	44	51	63	72	79	89	97
BZ-class			9	9	9	9	9	9	9	9	9
SHRnom : 0.50 SHRmax : 0.493											

LA50G24K

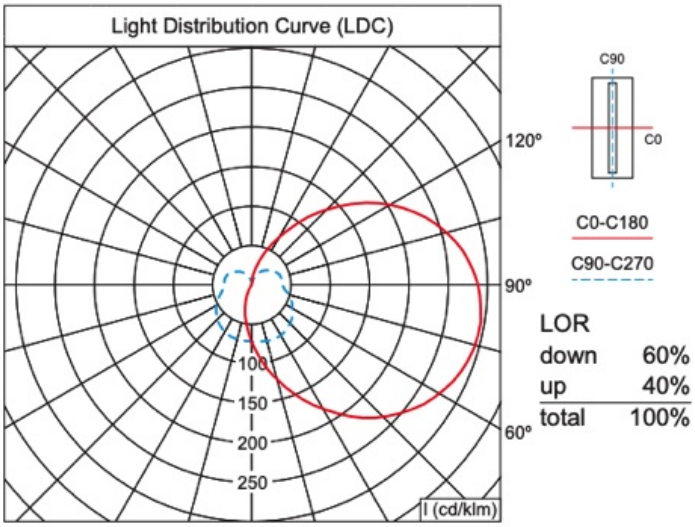

Utilisation Table (TM5)			LA50G24K-P17080102.IES								
Reflectances			Room Index								
C	W	F	0.75	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0
70	50	20	153	187	213	234	9	31	N/A	N/A	N/A
70	30	20	117	150	176	198	232	0	18	N/A	N/A
70	10	20	91	122	148	170	204	229	249	22	43
50	50	20	130	159	181	199	226	245	3	23	36
50	30	20	100	128	151	170	199	220	236	3	19
50	10	20	79	105	128	147	176	199	216	241	3
30	50	20	109	133	151	167	189	206	218	235	247
30	30	20	85	108	128	144	168	186	200	220	234
30	10	20	66	89	108	125	150	169	184	206	221
0	0	0	43	59	74	87	107	122	134	152	165
BZ-class			9	9	9	9	9	9	9	9	9
SHRnom : 0.50 SHRmax : 0.491											

Copyright © 2026 Davis Lighting. All Rights Reserved.

LARISSA LA

Wall Light

Dimensions

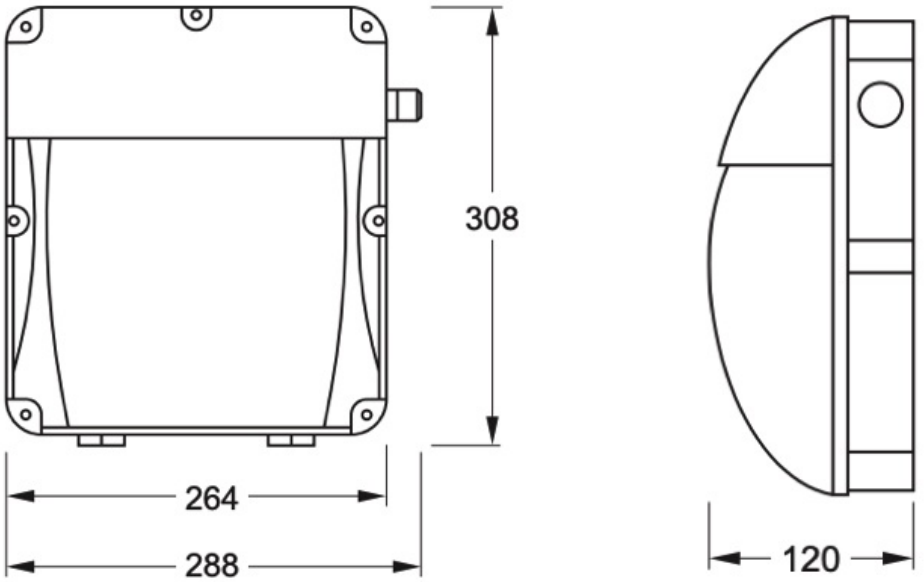

davislighting.com

All photometric and electrical data published are of ±10% tolerance. Characteristics and specifications may change without notice. All electrical installations / connections should be carried out by a suitably qualified person. Application images are indicative only and may not contain actual Davis product. The information contained in this publication is typical and must not be interpreted as a guarantee of individual product performance.

Generated on: 08-11-2026. Please contact the nearest Davis Lighting Sales Office or check our website for the latest product specifications.

Copyright © 2026 Davis Lighting. All Rights Reserved.